

YOUR FACTORY IS UNDER OUR WARRANTY

*insulating glass production machinery*


# GLASS MACHINERY

[www.lidermachine.com](http://www.lidermachine.com)



# MANUEL GLASS CUTTING TABLE

MANUEL CAM KESME  
MASASI

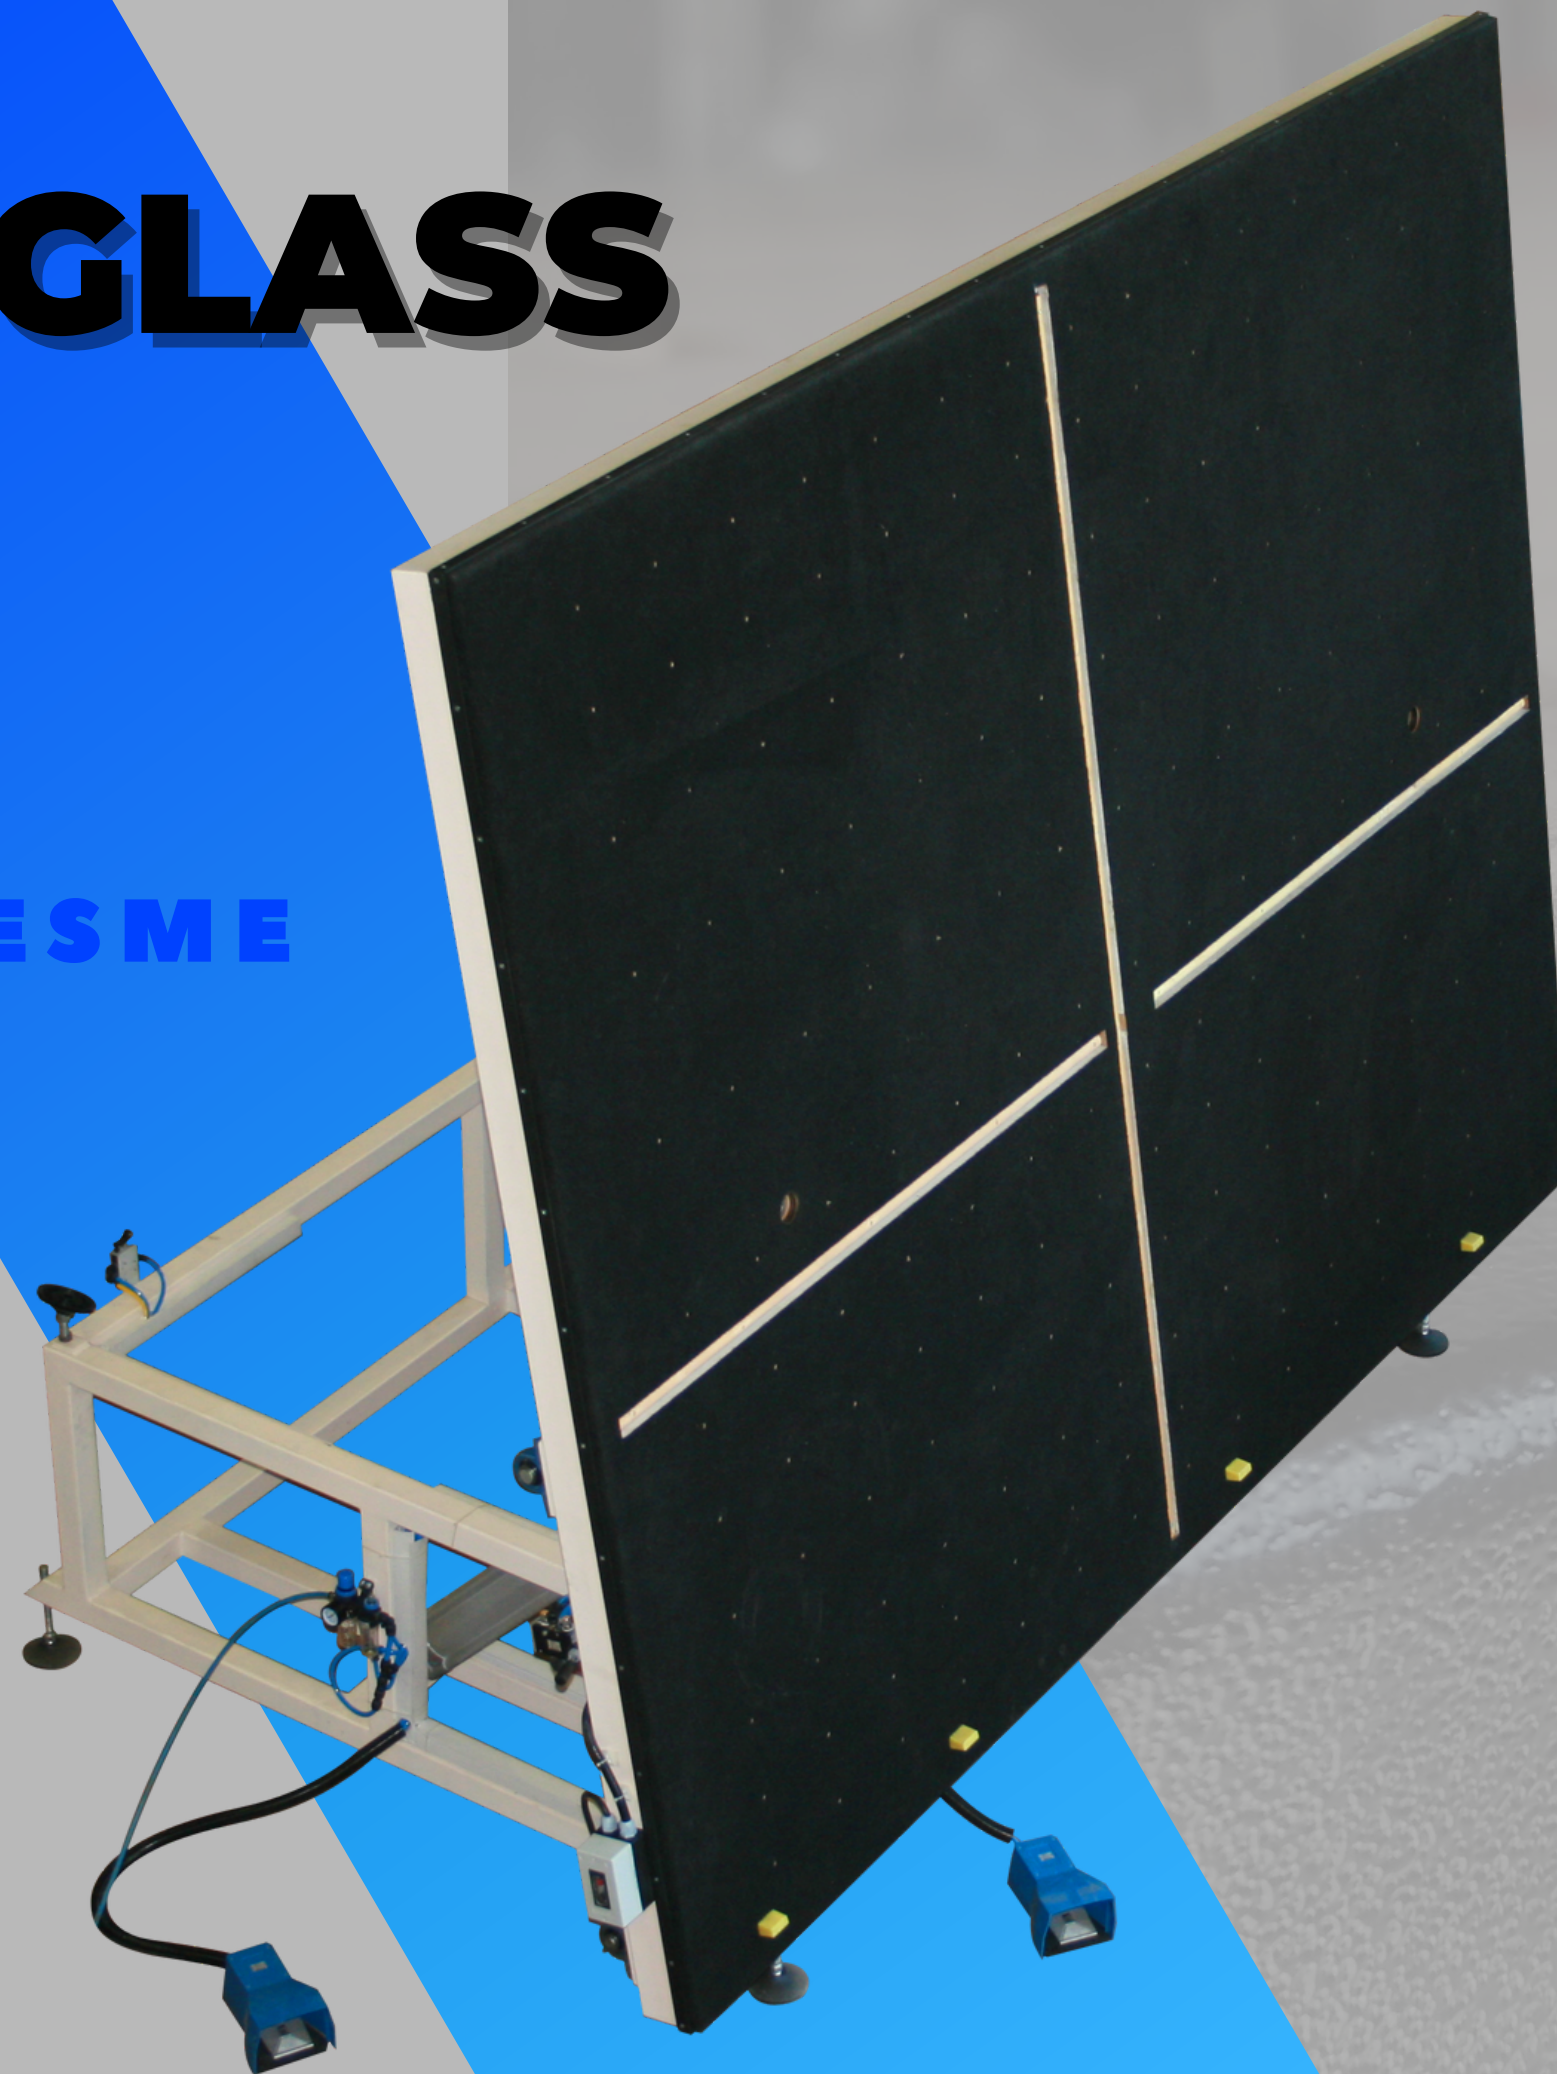

STRIP CUTS

# G-CUT 3210

MANUEL GLASS CUTTING TABLE

# MANUEL GLASS CUTTING TABLE

## MAKİNE ÖZELLİKLERİ:

Cam plakaları yükleyebilmek için tablanın pnömatik sistemle dikey pozisyona geçmesi.  
Cam plakaların kolay hareketini sağlayan hava yastığı sistemi  
Kesilmiş camları pnömatik kontrollü kırıcı çubuklar ile ayrıştırma  
Uzun ömürlü koruma için elektrostatik fırın boya  
Güvenlik koşullarına uygun elektrik sistemi

## OPSİYON:

Ray araba sistemli şerit keser ünite (x-y)

## MACHINE CHARACTERISTICS

To be able to load the glass plates, the table moves to the vertical position with the pneumatic or hydraulic system.  
Air cushion system for easy movement of glass plates  
Separating cut glass with pneumatically controlled breaker bars  
Electrostatic oven paint for long-lasting protection  
Electrical system suitable for safety conditions

## OPTION:

Strip cutting unit with rail car system (x-y)

glass  
cut  
table

STRIP CUTS

# G-CUT 3210

MANUEL GLASS CUTTING TABLE

## Model

## G-Cut 3700

|                          |                             |                   |
|--------------------------|-----------------------------|-------------------|
| LENGTH                   | UZUNLUK                     | 4000 mm           |
| HEIGHT                   | YÜKSELİK                    | 980 mm            |
| WIDTH                    | GENİŞLİK                    | 3130 mm           |
| WEIGHT                   | AGIRLIK                     | 1850 kg           |
| AIR CONSUMPTION          | HAVA TÜKETİMİ               | 6 bar             |
| MAX. CUTABLE GLASS SIZE  | MAX. KESİLEBİLİR CAM ÖLÇÜSÜ | 3210 X 2500 mm    |
| PORTABLE GLASS THICKNESS | TAŞINABİLİR CAM KALINLIĞI   | Min. 2mm Max.19mm |
| AIR CONSUMPTION          | HAVA TÜKETİMİ               | 100 lt/dakika     |
| NOISE HAS BEEN           | GÜRÜLTÜ ŞİDDETİ             | 75 dB (A)         |
| TOTAL POWER              | TOPLAM GÜÇ                  | 4 kW              |
| AIR BLOWER               | FAN MOTORU                  | 3 kW              |
| VOLTAGE                  | VOLTAJ                      | 400 V 3 NPE AC    |
| FREQUENCY                | FREKANS                     | 50 Hz             |

## 10 YEARS OF EXPERIENCE



LIDER Glass Machinery;

automatic glass cutting machine, automatic glass cutting line, digital glass cutting table, manual glass cutting table, automatic combination glass washing line double and triple glass production, automatic combination glass washing line facade glass production machine, standard glass washing machine, economic glass washing machine , servo controlled glass washing machine, silicone bonding glass putty extruder, polysulfide thiocol extruder, polyurethane glass putty extruder, hotmelt extruder machine, manual press table, Frezer freezer, standard rotary table, manual batten cutting machine, dehumidifier filling machine, automatic batten bending We manufacture machines with alternative solutions for the production of insulated glass, automatic dehumidifier filling machine, and heat insulated glass.

As LIDER Machine, we continue to produce innovative and technological heat insulated glass machines with our own designs of our research and development studies that we do in line with the wishes of our customers. We are always developing, growing and producing with our understanding of high quality production.



+90 262 504 78 70



info@lidermachine.com  
onder@lidermachine.com



www.lidermachine.com



Çerkesli OSB İmes San.Sit. 10.Cad. No:4  
Dilovası /KOCAELİ /TÜRKİYE

lider.cammakina



liderglassmachine



lidermachine



lider glass machinery



lider glass machinery



+90 (532) 400 70 70



www.lidermachine.com