

YOUR FACTORY IS UNDER OUR WARRANTY

*insulating glass production machinery*

# GLASS MACHINERY

[www.lidermachine.com](http://www.lidermachine.com)



# AUTOMATIC GLASS LOADING MACHINE


OTOMATİK CNC CAM  
YÜKLEME MAKİNESİ

SUCTION CUPS ARMS

# GLM

GLM 3210 / GLM 6032  
standard jumbo

GLASS LOADER

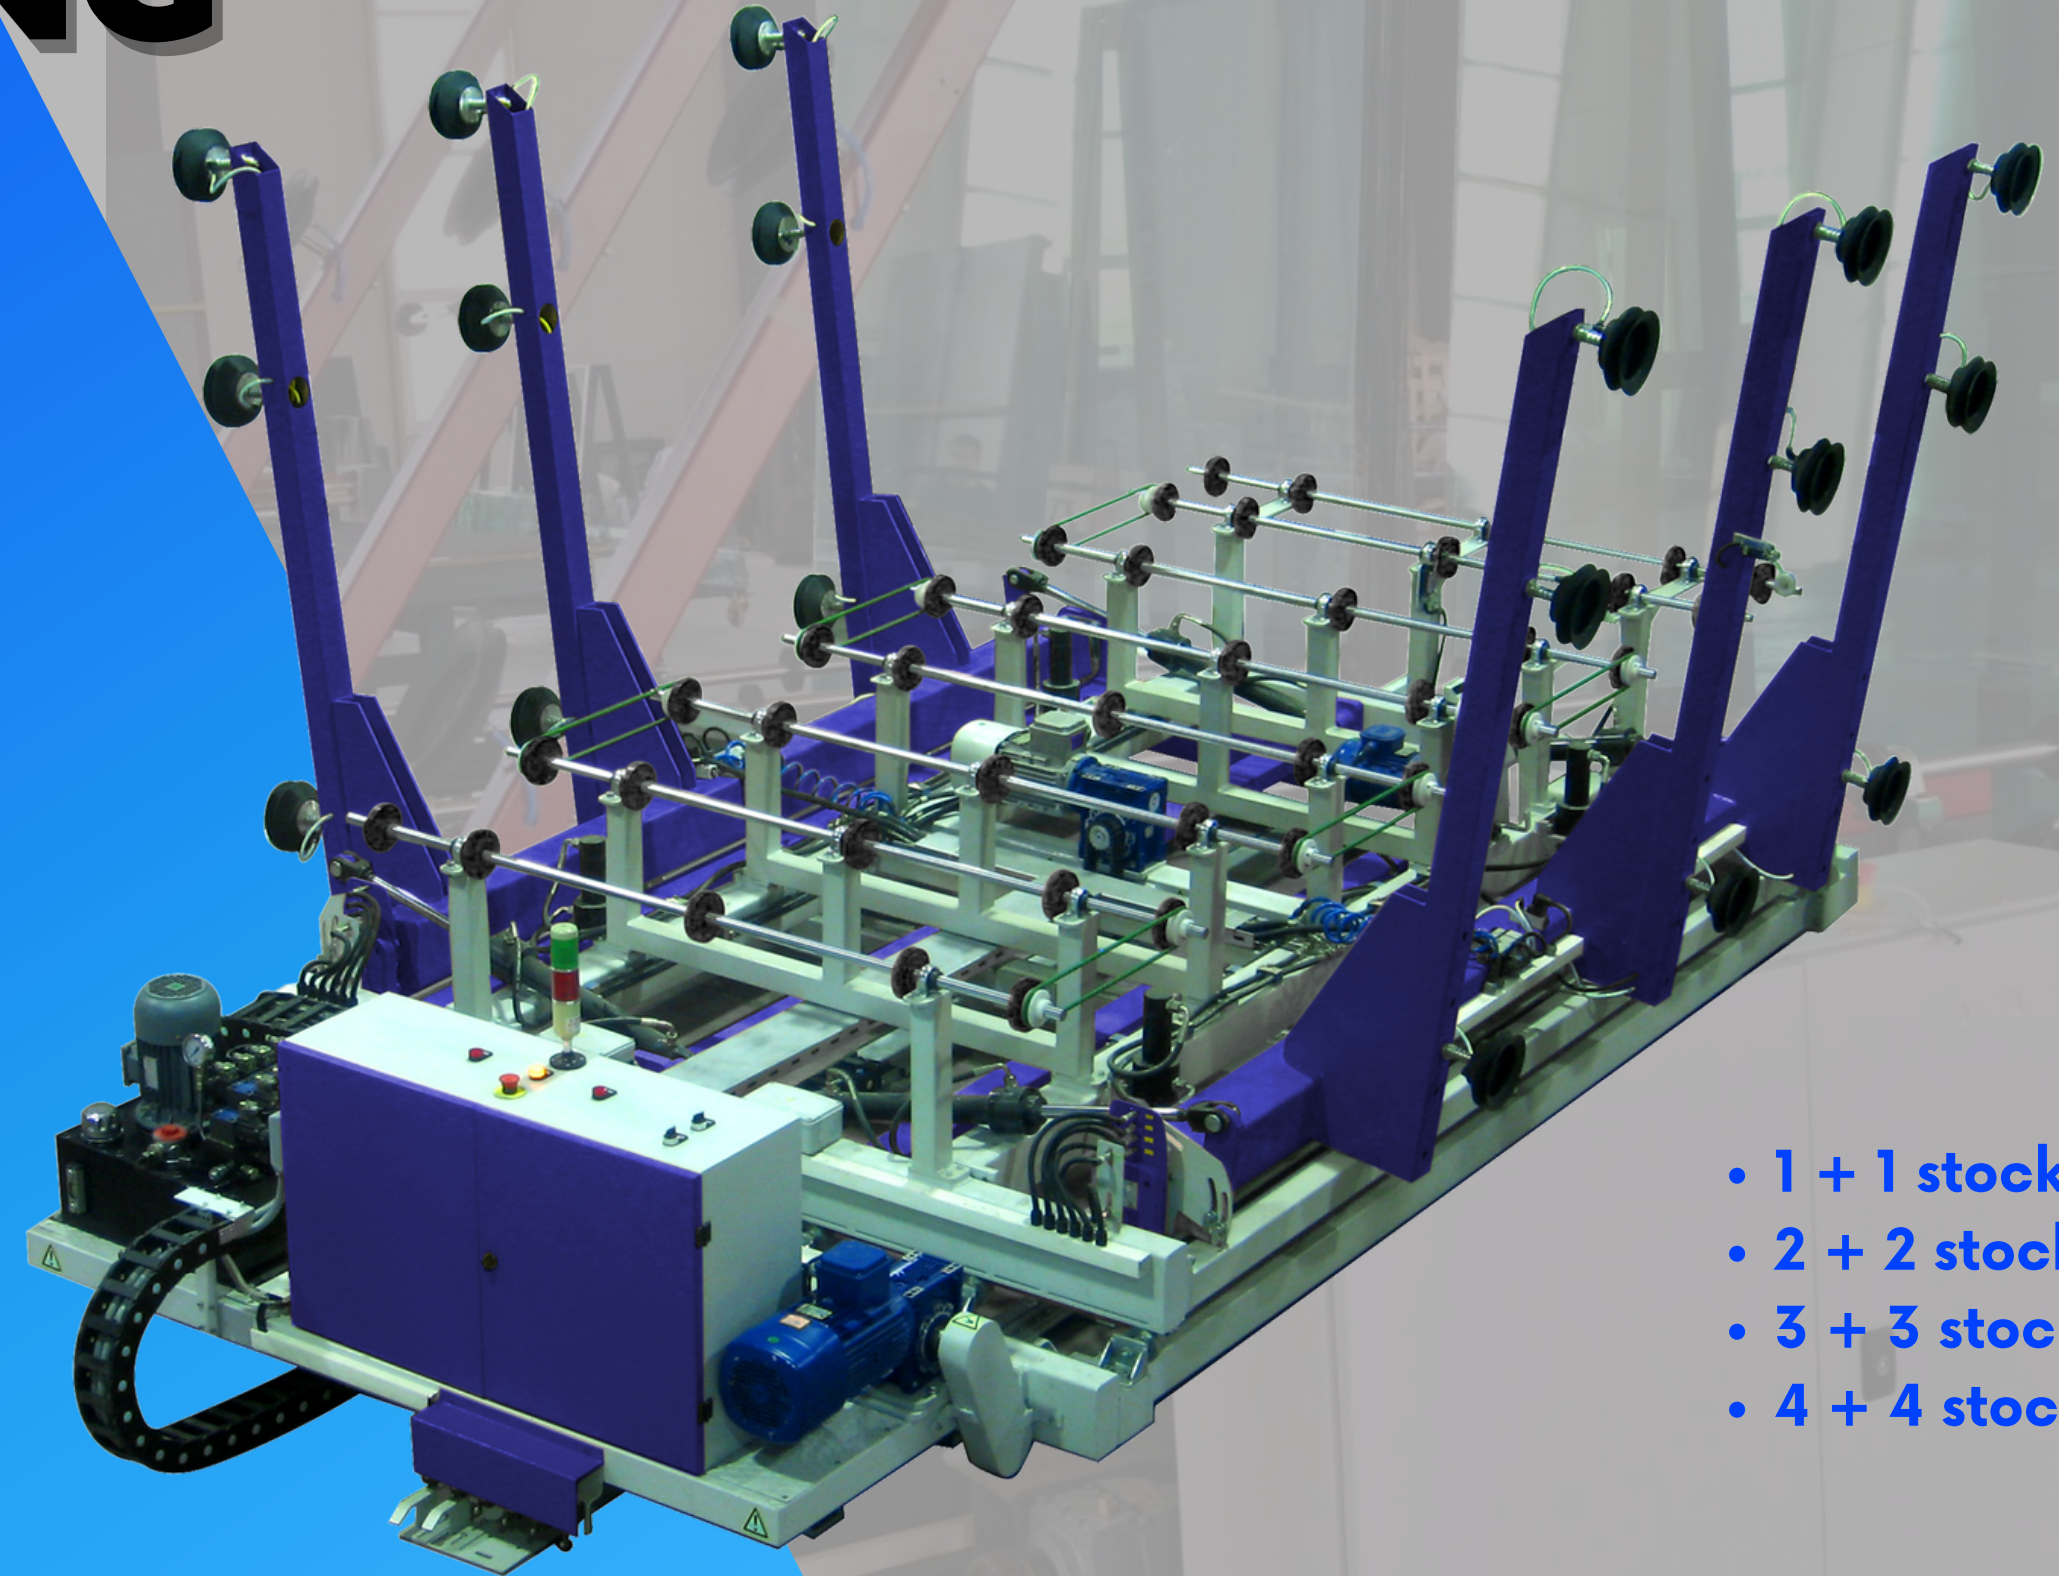

- 1 + 1 stock
- 2 + 2 stock
- 3 + 3 stock
- 4 + 4 stock

# AUTOMATIC GLASS LOADING MACHINE

## MAKİNE ÖZELLİKLERİ

Otomatik veya manuel (elle) kullanım seçeneği  
Plc kontrollü ünite  
Yükleme Hızı: 0 – 30 m/dk.  
Yüklenebilir Cam Kalınlığı: 3 – 19 mm.  
Plakalar istasyonlardan "Cam Ayırma Sistemi" ile güvenli ve hızlı bir şekilde yüklenir.  
Plaka cam istasyonundan yüklendikten sonra makine üzerinde kesim masasına gönderilmeden önce otomatik olarak gönyelenir.  
"Cam Transfer Butonu" yardımıyla kolay ve hızlı cam transferi gerçekleştirilir

## OPSİYON:

- Ekstra stok rafları
- Çift taraflı stok rafı

## MACHINE CHARACTERISTICS

Automatic / Manual operating option  
Plc controlled unit  
Loading Speed: 0 – 30 m/min.  
Loadable Glass Thickness: 3 – 19 mm.  
Sheets can be loaded from stations with "Sheet Separating System" easily and fast.  
Before transferring sheet from glass loading machine to glass cutting machine, sheet is automatically squared on loading machine.  
By "Glass Transferring Button" easy and fast glass transferring

## OPTION:

- Extra stock shelves
- Double sided stock rack

CAM YÜKLEME HATLARI

# LOADER

loader machine

Model		GLM 3210 Standart Cam Ebadı 7,5 m. – 4 stand (2+2) 10,5m. – 6 stand (3+3)	GLM 6032 Jumbo Cam Ebadı 12,5 m. – 4 stand (2+2) 19,5m. – 6 stand (3+3)
Length	Uzunluk	4350 mm.	5200 mm.
Height	Yükseklik	940 mm	960 mm.
Width	Genişlik	2350 mm	3500 mm
Weight	Ağırlık	1500 kg	2700 kg
downloadable Glass Dimensions	Min (mm)	Yüklenebilir Cam Ebatları	1000 x 1000
	Max (mm)		3210x2500
downloadable Glass Thickness	Min (mm)	Yüklenebilir Cam Kalınlığı	3
	Max (mm)		19
Noise Emission Level	Gürültü Emisyon Seviyesi	75 dB(A)	75 dB(A)
Air Consumption	Hava Tüketimi	30 lt/dk	60 lt/dk
Voltage	Voltaaj	400 V 3 NPE AC	400 V 3 NPE AC
Frequency	Frekans	50 Hz.	50 Hz.
Total power	Toplam Güç	17Kw	27Kw

GLM SHEPPER

## 10 YEARS OF EXPERIENCE



LIDER Glass Machinery;

automatic glass cutting machine, automatic glass cutting line, digital glass cutting table, manual glass cutting table, automatic combination glass washing line double and triple glass production, automatic combination glass washing line facade glass production machine, standard glass washing machine, inox body glass washing machine , servo controlled panell pressing glass washing machine, silicone bonding extruder, polysulfide thiocol extruder, polyurethane extruder, hotmelt extruder machine, manual press table, Frezer, standard rotary table, manual cutting machine, desiccant filling machine, automatic bending machine We manufacture machines with alternative solutions for the production of insulated glass, automatic desiccant filling machine and heat insulated glass.

As LIDER Machine, we continue to produce innovative and technological heat insulated glass machines with our own designs of our research and development studies that we do in line with the wishes of our customers. We are always developing, growing and producing with our understanding of high quality production.



+90 262 504 78 70



info@lidermachine.com  
onder@lidermachine.com



www.lidermachine.com



Çerkesli OSB İmes San.Sit. 10.Cad. No:4  
Dilovası /KOCAELİ /TÜRKİYE

lider.cammakina



liderglassmachine



lidermachine



lider glass machinery



lider glass machinery



+90 (532) 400 70 70



www.lidermachine.com